

To be published in Optics Letters:

Title: All-fiber Q-switched single-frequency Tm-doped laser near 2 μ m
Authors: Jihong Geng, Qing Wang, Jake Smith, Tao Luo, Shibin Jiang, and Farzin Amzajerdian
Accepted: 26 October 2009
Posted: 2 November 2009
Doc. ID: 117603

All-fiber Q-switched single-frequency Tm-doped laser near 2 μ m

Jihong Geng^{1*}, Qing Wang¹, Jake Smith¹, Tao Luo¹, Farzin Amzajerdian²
Shibin Jiang¹

¹AdValue Photonics, 4585 S Palo Verde Rd., Suite 405, Tucson, AZ 85714, USA.

²NASA Langley Research Center, 5 North Dryden St. Hampton, VA 23681

*Corresponding author: jgeng@advaluephotonics.com

Abstract

We present an all-fiber Q-switched single-frequency laser oscillator operating in the eye-safe region at 1950nm. It is based on stress-induced polarization modulation in a Tm-doped distributed Bragg reflector (DBR) fiber laser. The laser emits Q-switched single-frequency laser pulses with a pulse repetition rate ranging from tens of Hz to hundreds of kHz and average power of several milli-watts. Pulse duration and laser spectral linewidth has been characterized. This is, to our best knowledge, the first demonstration of a Q-switched single-frequency fiber laser near 2 μ m.

OCIS Codes: (060.2320) Fiber optics amplifiers and oscillators; (140.3540) Lasers, Q-switched; (140.3510) Lasers, fiber; (140.3570) Lasers, single-mode;

Many applications, such as coherent lidar and atmospheric sensing, require compact coherent pulsed laser sources preferably operating in the eye-safe spectral region near $2\mu\text{m}$, because some important green-house gas molecules and water vapor in the atmosphere exhibit characteristic absorption lines in this region. For decades, Q-switched single-frequency Tm- or Ho-doped crystal lasers have been used in these applications [1], although they suffer from a complicated free-space laser cavity design. All-fiber monolithic laser sources are highly desirable for these applications, especially for airborne and space-borne applications, because fiber-based sources offer a much more compact and robust solution. With the advances in photonic component technologies developed mainly for telecommunication and fiber laser industries in recent years, all-fiber single-frequency pulsed laser sources become readily available at shorter wavelengths, i.e., $1.55\mu\text{m}$ and $1\mu\text{m}$ as well. High-power single-frequency pulse radiation can simply be generated from directly-modulated distributed feedback semiconductor laser and/or single-frequency fiber oscillators in combination with fiber- or crystal-based high power amplifiers. For the long wavelengths near $2\mu\text{m}$, fiber components are not as readily available as those at the short wavelengths ($1.55\mu\text{m}$ and $1\mu\text{m}$). Although continuous-wave (CW) single-frequency fiber lasers near $2\mu\text{m}$ have been demonstrated in several research groups in recent years [2]-[6], pulsed single-frequency fiber sources have never been reported at the wavelength. In this Letter, we report an all-fiber Q-switched single-frequency laser oscillator near $2\mu\text{m}$, which is to our knowledge, the first report of this kind of laser in the $2\mu\text{m}$ region.

Figure 1 shows our experimental setup. The approach for an all-fiber Q-switched single-frequency laser is based on polarization modulation of a short-cavity fiber laser by using stress-induced birefringence [7], as we demonstrated in Er-doped and Yb-doped fiber lasers previously [8][9]. The design concept is that a single-frequency fiber laser with distributed Bragg reflector (DBR) cavity configuration is formed by a non-polarization-maintaining (non-PM) high-reflectivity fiber Bragg grating (FBG) and a polarization-maintaining (PM) narrow-band FBG that acts as an output coupler. The combined use of a short laser cavity (a few centimeters in length) and narrow-band distributed Bragg reflectors (i.e., FBGs) ensures robust single-frequency operation in the fiber laser. Because of the birefringence in PM fiber, the PM FBG has two different reflective wavelengths, originating from different refractive index along two polarization axes (i.e., slow axis and

fast axis) of the PM fiber. These two FBGs are designed so that only for one specific state of polarization the PM FBG has a matched reflective wavelength with that of the non-PM FBG, thereby resulting in laser oscillation in this specific state of polarization. For the orthogonal polarization direction, no laser oscillation can occur. To achieve Q-switching in the fiber laser, an appropriate amount of pre-loaded stress is applied to a small section of the active fiber inside the laser cavity at an angle of 45 degree relative to the axes of the PM FBG. This stress-induced birefringence acts as a wave-plate so that the intracavity light has the orthogonal direction of polarization with a low Q-value in the fiber laser cavity, thereby preventing laser oscillation. A small piezo actuator is used to quickly release the preload stress to obtain a high Q-value in the cavity, resulting in the generation of Q-switched single-frequency pulses in the preferred specific state of polarization. More detailed information about stress-induced birefringence in an optical fiber for the Q-switching operation has been discussed previously [7][8].

In this experiment, the reflective wavelength along the fast-axis of the PM FBG (~70% reflectivity) was matched with the reflection band of the non-PM FBG (>99% reflectivity), as shown in the inset pictures of Figure 1. A short piece (~2cm long) of active fiber was spliced with the two FBGs to form a DBR fiber cavity for single-frequency laser operation. The active fiber is non-polarization-maintaining fiber, which is our newly-developed single-mode Tm-doped silicate fiber. The fiber has a core diameter of 10 μm and NA of 0.136 with Tm-doping concentration of 5wt%. High doping concentration of the fiber enables efficient cross relaxation. Our earlier experiments have demonstrated high pump absorption and high-gain per unit length with the fiber under both core- and cladding-pump configurations [10].

The DBR fiber laser was core-pumped with a fiber MOPA system operating at 1575nm wavelength. The master oscillator was a 45-mW single-mode diode-pumped Er-doped fiber laser, and its power was boosted by a cladding-pumped Er/Yb co-doped fiber amplifier delivering maximum output power of 600mW at 1575nm. Core pump absorption of our Tm-doped fiber was measured to be about 1.7dB/cm at 1575nm. In the CW single-frequency operation, the DBR fiber laser has a threshold pump power of 150mW with slope efficiency of 37% relative to the absorbed pump power [10]. Tens of mW output power has been generated from the laser in the CW mode. The relatively high laser

threshold was attributed to high cavity loss, including output coupling loss (~70% reflectivity) and splicing losses (~2.2dB) between the active fiber and two FBGs.

Figure 2 shows the spectra of the DBR laser in the CW mode and Q-switched mode operation. Since both the preloaded stress and the PZT-induced stress were applied only to the section of the active fiber, rather than the FBGs, the laser center wavelength keeps unchanged when switching the laser from CW mode to Q-switching mode. The laser spectral linewidth can not be directly obtained from these spectra because the spectral linewidth of the laser is expected to be much narrower than the minimum spectral resolution (~0.08nm) of the optical spectrum analyzer (OSA).

When the preload stress was applied to the active fiber, the polarization of the intracavity beam could be modulated by the PZT-induced stress, which offers the Q-switching mechanism in the all-fiber laser. Figure 3 shows typical traces of the Q-switched pulse trains and the corresponding PZT drive signals. The repetition rate of the Q-switched fiber laser can be tuned from tens of Hz to hundreds of kHz simply by using different PZT drive signals. When changing the repetition rate, however, pump power and the PZT drive signal need to be adjusted for optimal Q-switching operation. When the Q-switched laser operates at high pump power or at low repetition rate (<500Hz), more cares need to be taken for preventing the laser from parasitic pulse oscillation. Several milli-watt average output power can be readily generated from the Q-switched laser, but it has a much lower slope efficiency (~5%) than that of the laser in the CW mode (~37%). The lower efficiency in the Q-switching operation is attributed to an additional cavity loss induced by the preload, due to micro-bending of the active fiber near the edge of the small piezo actuator. A better design for the preloading mechanism may eliminate the micro-bending loss and significantly improve the laser efficiency.

As can be seen in Figure 3, the buildup time (or delay) of Q-switched pulses with respect to their drive signals was varied with repetition rate, and pump power as well. At a specific repetition rate and pump power, no significant pulse jitter was observed on the oscilloscope in short term, but in long-term operation the pulse build-up time could change due to the slow slippage of either the preload or the PZT-induced stress, and temperature re-distribution along the fiber as well. In the optimal Q-switching operation, short-term peak-to-peak power variation can be less than 5%.

Pulse duration of the Q-switched 2 μ m laser was measured with a 40MHz-bandwidth photodiode (Thorlab, PDA10D). Figure 4 shows typical traces of the Q-switched pulses. The laser pulse duration is dependent on both the repetition rate and pump power. When operating at the repetition rates below several tens of kHz, the laser delivers short pulses with a measured duration of about 40ns or less, which was limited by the bandwidth of the photodiode. When the repetition rate was higher (e.g., >100kHz), the pulses were longer (100~200 ns) than the resolution limit of the photodiode. The observed pulse width dependence on the repetition rate is qualitatively consistent with the previous reports [8][9].

Single-frequency laser operation in the Q-switched mode was confirmed by using an in-house fiber-based scanning Fabry-Perot interferometer. The interferometer was constructed with two identical high-reflective FBGs at the same wavelength as the laser wavelength (1950nm), which were fusion-spliced together with a distance of about 12cm. It was scanned by applying a saw tooth voltage over a small piece of piezo actuator, on which a portion of the fiber of the interferometer was glued. Figure 5 shows the laser spectra when the interferometer was scanned over one free spectrum range (FSR ~ 800MHz). These spectra correspond to the Q-switched pulses at two different repetition rates (125kHz and 12.5kHz). From these data, it can be seen that spectral linewidth of the Q-switched pulses is determined by their pulse duration, which is in turn determined by pulse repetition rate and pump power. When the repetition rate is high (> 100kHz), the Q-switched laser has a long pulse duration (100~200ns) but with a narrow spectral linewidth (~15MHz), which is close to the resolution limit of the FP interferometer (with an estimated finesse of about 100) used in the experiment. Figure 5 (a) shows the spectrum of the Q-switched pulses at repetition rate of 12.5kHz. The spectral linewidth can be estimated to be about 30MHz. Assuming that the Q-switched pulses are Fourier transform-limited as shown in an Er-fiber system [11], the duration of the pulses at 12.5kHz should be about 10ns, instead of 40ns shown in Figure 4.

In summary, an all-fiber Q-switched single-frequency laser operating in the 2 μ m region has been demonstrated for the first time. The Q-switched laser can be operated in a wide range of repetition rates ranging from tens of Hz to hundreds of kHz with several milli-watt average output power and with tens of MHz spectral linewidth. Power of the

narrow-linewidth Q-switched laser pulses can be readily boosted by using multi-stage Tm-doped fiber amplifiers, as done in the 1.55 μm fiber system [11], which could find potential applications for airborne coherent lidar and atmosphere remote sensing.

This work was supported by NASA SBIR project NNX09CF21P.

Published by
OSA

References with title:

- [1] S. W. Henderson, P. J. M. Suni, C. P. Hale, S. M. Hannon, J. R. Magee, D. L. Bruns, and E. H. Yuen, "Coherent laser radar at 2 μ m using solid-state lasers," IEEE Trans. Geoscience and Remote Sensing. **31**, 4-15 (1993).
- [2] S. Agger, J. H. Povlsen, and P. Varming, "Single-frequency thulium-doped distributed-feedback fiber laser," Opt. Lett. **29**, 1503-1505 (2004).
- [3] N. Y. Voo, J. K. Sahu, M. Ibsen, "345-mW 1836-nm single-frequency DFB fiber laser MOPA", IEEE J. Photonics Technology Letters, **17**, 2550 – 2552, (2005).
- [4] D. Gapontsev, N. Platonov, M. Meleshkevich, O. Mishechkin, O. Shkurikhin, S. Agger, P. Varming, J.H. Povlsen, "20W single-frequency fiber laser operating at 1.93 μ m", in the Preceding of the Conference on Lasers and Electro-Optics, paper CFI5, (6-11 May 2007).
- [5] Z. Zhang, D. Y. Shen, A. J. Boyland, J. K. Sahu, W. A. Clarkson, and M Ibsen, "High-power Tm-doped fiber distributed-feedback laser at 1943nm," Opt. Lett., **33**, 2059-2061 (2008).
- [6] J. Geng, J. Wu, S. Jiang, and J. Yu, "Efficient operation of diode-pumped single-frequency thulium-doped fiber lasers near 2 μ m", Opt. Lett., **32**, 355-357, (2007).
- [7] Y. Kaneda, C. Spiegelberg, J. Geng, and Y. Hu, "All-fiber Q-switched laser", US Patent 7130319, (2006).
- [8] Y. Kaneda, Y. Hu, C. Spiegelberg, J. Geng, and S. Jiang, "Single-frequency, all-fiber Q-switched laser at 1550-nm", in the Preceding of Advanced Solid-State Photonics, Vol. 94 of 2004 OSA Trends in Optics and Photonics Series (Optical Society of America, 2004), Post-deadline paper PD5.
- [9] M. Leigh, W. Shi, J. Zong, J. Wang, and S. Jiang, "Compact, single-frequency all-fiber Q-switched laser at 1 μ m," Opt. Lett., **32**, 897-899 (2007).
- [10] J. Geng, Q. Wang, T. Luo, S. Jiang, and F. Amzajerjian, "Single-frequency narrow-linewidth Tm-doped fiber laser using silicate glass fiber", (Accepted for publication in Optics Letters).
- [11] W. Shi, M Leigh, J. Zong, and S. Jiang, "Single-frequency terahertz source pumped by Q-switched fiber lasers based on difference-frequency generation in GaSe crystal", Opt. Lett, **32**, 949-951, (2007).

References without title:

- [1] S. W. Henderson, P. J. M. Suni, C. P. Hale, S. M. Hannon, J. R. Magee, D. L. Bruns, and E. H. Yuen, *IEEE Trans. Geoscience and Remote Sensing*, **31**, 4-15 (1993).
- [2] S. Agger, J. H. Povlsen, and P. Varming, *Opt. Lett.* **29**, 1503-1505 (2004).
- [3] N. Y. Voo, J. K. Sahu, M. Ibsen, *IEEE J. Photonics Technology Letters*, **17**, 2550 – 2552, (2005).
- [4] D. Gapontsev, N. Platonov, M. Meleshkevich, O. Mishechkin, O. Shkurikhin, S. Agger, P. Varming, J.H. Povlsen, , in the Preceding of the Conference on Lasers and Electro-Optics, paper CFI5, (6-11 May 2007).
- [5] Z. Zhang, D. Y. Shen, A. J. Boyland, J. K. Sahu, W. A. Clarkson, and M Ibsen, *Opt. Lett.*, **33**, 2059-2061 (2008).
- [6] J. Geng, J. Wu, S. Jiang, and J. Yu, *Opt. Lett.*, **32**, 355-357, (2007).
- [7] Y. Kaneda, C. Spiegelberg, J. Geng, and Y. Hu, “All-fiber Q-switched laser”, US Patent 7130319, (2006).
- [8] Y. Kaneda, Y. Hu, C. Spiegelberg, J. Geng, and S. Jiang, in the Preceding of Advanced Solid-State Photonics, Vol. 94 of 2004 OSA Trends in Optics and Photonics Series (Optical Society of America, 2004), Post-deadline paper PD5.
- [9] M. Leigh, W. Shi, J. Zong, J. Wang, and S. Jiang, *Opt. Lett.*, **32**, 897-899 (2007).
- [10] J. Geng, Q. Wang, T. Luo, S. Jiang, and F. Amzajerjian, “Single-frequency narrow-linewidth Tm-doped fiber laser using silicate glass fiber”, (Accepted for publication in *Optics Letters*).
- [11] W. Shi, M Leigh, J. Zong, and S. Jiang, *Opt. Lett.*, **32**, 949-951, (2007).

Figures and figure caption:

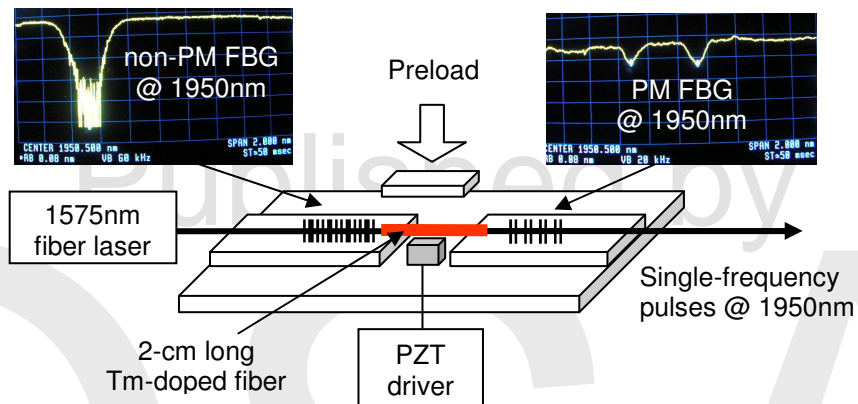


Figure 1. Diagram of the experimental setup. A Tm-doped DBR fiber cavity was formed by two FBGs. Preload force and PZT-induced stress are applied to a small section of the active fiber for polarization modulation. Inset: transmission spectra of the two FBGs measured with an in-house 2 μ m broadband fiber source.

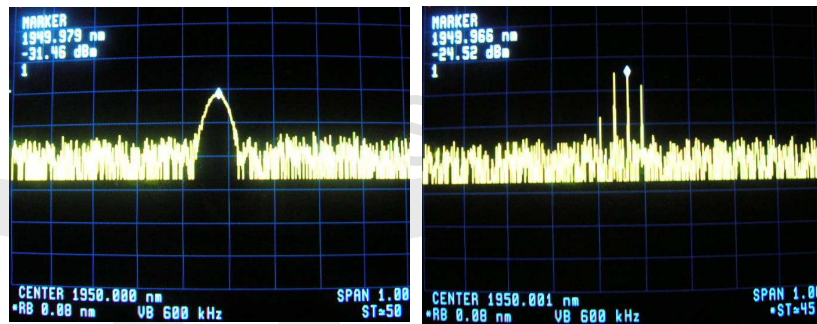


Figure 2. Laser spectra of the DBR fiber laser in CW mode (Left) and Q-switched mode (Right). The four peaks in the graph on the right correspond to four sequential Q-switched pulses when the Hewlett-Packard optical spectrum analyzer was scanning across the laser wavelength.

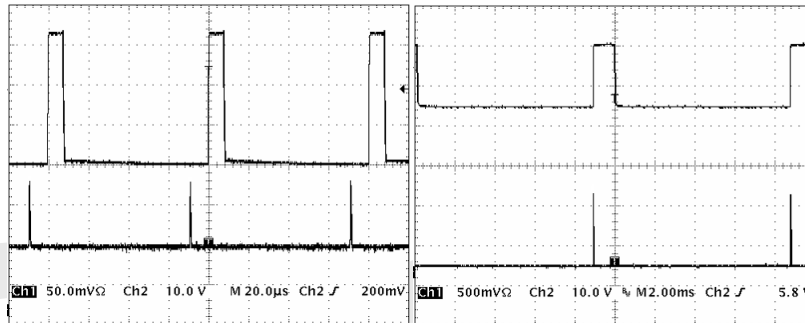


Figure 3. Typical traces of the Q-switched pulse trains (lower trace) and the corresponding PZT drive signals (upper trace) for repetition rate of 12.5kHz (Left) and 100Hz (Right).

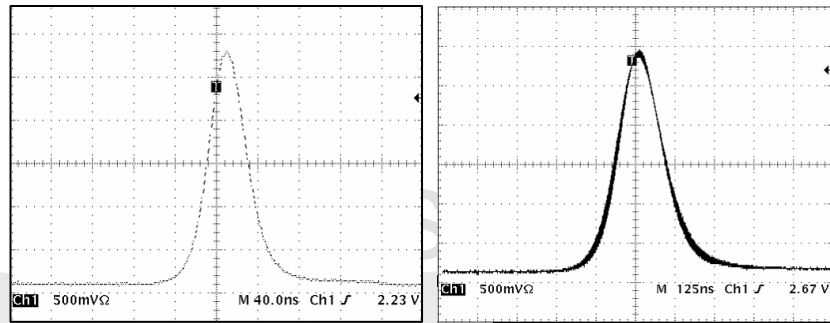


Figure 4. Typical traces of the Q-switched pulses at 12.5kHz (Left: <math><40\text{ns}</math>) and 125kHz (Right: $>100\text{ns}$).

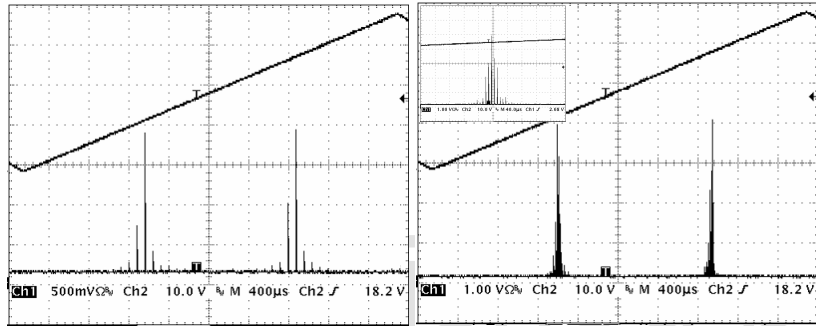


Figure 5. Laser spectrum over one free spectral range (FSR=800MHz) of a Fabry-Perot interferometer that verified single-frequency operation of the all-fiber Q-switched laser at 12.5kHz (Left) and 125kHz (Right). The inset in the right graph shows a zoom-in spectrum.